

Context-Aware Sit-Stand Desk for Promoting Healthy and Productive Behaviors

Donghan Hu
Virginia Tech
Blacksburg, USA
hudh0827@vt.edu

Joseph Bae
Virginia Tech
Blacksburg, USA
baejoseph@vt.edu

Sol Lim
Virginia Tech
Blacksburg, USA
sol@vt.edu

Sang Won Lee
Virginia Tech
Blacksburg, USA
sangwonlee@vt.edu

ABSTRACT

To mitigate the risk of chronic diseases caused by prolonged sitting, sit-stand desks are promoted as an effective intervention to foster healthy behaviors among knowledge workers by allowing periodic posture switching between sitting and standing. However, conventional systems either let users manually switch the mode, and some research visited automated notification systems with pre-set time intervals. While this regular notification can promote healthy behaviors, such notification can act as external interruptions that hinder individuals' working productivity. Notably, knowledge workers are known to be reluctant to change their physical postures when concentrating. To address these issues, we propose considering work context based on their screen activities to encourage computer users to alternate their postures when it can minimize disruption, promoting healthy and productive behaviors. To that end, we are in the process of building a context-aware sit-stand desk that can promote healthy and productive behaviors. To that end, we have completed two modules: an application that monitors users' computer's ongoing activities and a sensor module that can measure the height of sit-stand desks for data collection. The collected data includes computer activities, measured desk height, and their willingness to switch to standing modes and will be used to build an LSTM prediction model to suggest optimal time points for posture changes, accompanied by appropriate desk height. In this work, we acknowledge previous relevant research, outline ongoing deployment efforts, and present our plan to validate the effectiveness of our approach via user studies.

KEYWORDS

Sedentary Postures, Context-Awareness, Metadata, Healthy and Productive Behaviors, Interruption, Working Context Analysis

1 MOTIVATION

The prevalence of sedentary posture among knowledge workers has significantly grown due to the nature of knowledge-driven work, which involves extended periods of sitting, such as document writing, programming, playing games, and video editing. Previous studies indicated that, on average, students and workers who primarily use computers at work spend a longer time, approximately 50 hours [18, 20, 25]. Indicated by investigations, prolonged sitting has been revealed to be associated strongly with a range of health concerns, such as cardiovascular diseases [23], back & shoulder pain [6], mental wellness [2, 19] and even premature death [8]. Furthermore, extended static sitting behaviors — such as at a desk, behind wheels, or in front of a screen — can also be harmful.

Based on this fact, sit-stand desks and adjustable-height surfaces are suggested and used to counteract unhealthy sedentary

behaviors by standing intermittently [4, 16, 17]. However, while researchers have suggested switching between postures for health benefits, establishing such a habit is left to workers. Therefore, it is easy to forget about sit-stand desks unless conscious efforts are put into forming a desirable habit, and sit-stand desks are often underutilized. The state-of-the-art approach to facilitate physical postural alterations is using notifications that alert workers to switch their postures or automatically switch to standing mode at fixed intervals (e.g., standing 10 to 20 minutes after one hour's working or sending a notification every two hours) [1, 3, 22]. One limitation of the notification or automated approach is that regular external interruption could disrupt the continuity of cognitive focus on ongoing tasks [5], which is considered a significant barrier to workers' productivity. Specifically, routine notifications during computing tasks are more likely to result in losing track of task goals [12]. Indeed, a study showed that individuals prefer sitting for cognitively demanding tasks while favoring standing postures for less cognitively demanding ones [3]. Considered as "natural break-points," switching ongoing activities and completing a task are acceptable situations for posture transitions with low side-effects after interruptions [7, 11, 21].

2 CONTEXT-AWARE SIT-STAND DESK

To address these challenges and provide a holistic solution given the consideration of well-being, willingness, working context, and efficiency, we propose an intelligent sit-stand system that can foster *healthy and productive* behaviors by comprehending contextual activities and personal preferences. By incorporating insights from sit-stand desk research and context-aware productivity tools [9, 13, 14, 17], we propose the idea of leveraging workers' contextual properties (e.g., metadata of working context) and personal routines (e.g., preferred physical postures at a particular time) to find suitable time blocks in which users are willing to adopt comfortable positions and avoid distractions. Our ongoing process involves collecting data to develop a predictive model and conducting a follow-up interview to identify the factors we should consider in designing the context-aware sit-stand desk. We introduce the following three development components that constitute context-aware sit-stand desks:

Collection of metadata for computer activities ScreenTracker collects work context information to gain insights into users' ongoing tasks based on the frontmost application. ScreenTracker, is a software that can track, analyze and record the metadata of a computer's frontmost application (e.g., website title and URL for browsers and document name and file path). We encrypt all the collected data as the metadata may contain personal information that should not be shared in case of data leaks. ScreenTracker also




Figure 1: ScreenTracker notification for acquiring user willingness to switch current postures.

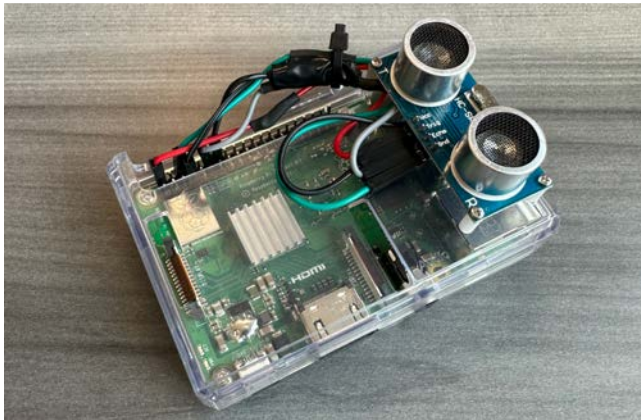


Figure 2: Raspberry Pi model with a distance sensor to monitor and log desk height in real-time.

notifies users every 30 minutes to collect their willingness to switch current postures via a 6-point Likert scale question at the moment, shown in Figure 1, which we can collect more information about whether they would be willing to switch to standing mode given the types of tasks that they are working on. For example, if they are in the middle of Zoom meetings, it would be awkward to switch the mode, which may look distracting to people in the meeting.

Real-time detection of working space height The second type of data we collect, critical to predicting their optimal moments, is users' actual usage of sit-stand desks. We prototyped a sensor module (shown in Figure 2) that uses Raspberry Pi with a distance sensor to detect desk height persistently in real-time and collect their behavioral dataset. We utilized Raspberry Pi 3 Model B+ and an HC-SR04 Ultrasonic Sensor to constantly track desk height in inches. By monitoring the desk height in seconds, we can associate contextual data and willingness data that ScreenTracker collects with users' desk usage. The sensor sampling rate is 60 Hz, so we use exponential smoothing to log the desk height every second. We will analyze in sync with contextual data collected from ScreenTracker. **Development of an LSTM model for prediction** We will build an LSTM model with these two data types to predict the proper timing when users are willing to switch postures based on computer activities. Using the bi-LSTM model for forecasting time-series probabilities, our approach focuses on developing a statistical model to predict workers' willingness to switch between sit-stand postures at different time periods, as shown in Figure 3.

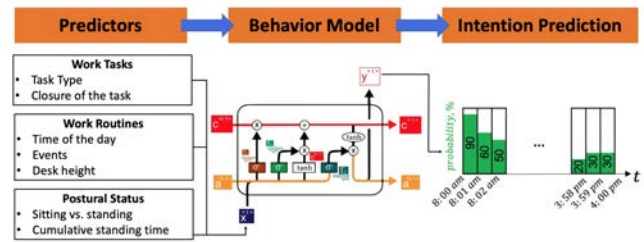


Figure 3: A bi-LSTM model for intention prediction. The outcome variable is a time-series forecast on the willingness to change postures at a given time interval.

3 ONGOING EFFORTS

In the current stage, we are collecting work context metadata, willingness to switch postures, and real-time desk height by installing the ScreenTracker on computers and the sensor module in working spaces via field studies. We plan to ask them to use ScreenTracker and the sensor module for three weeks to collect data and allocate one week for a cool-down period as their behaviors immediately after installing modules can change due to the experiment condition. Thus, we have two weeks for data collection. Additionally, in one or two weeks, we will turn off the willingness questionnaire to understand how their behaviors are affected by the willingness questions on ScreenTracker. We plan to conduct an exit interview after the data collection period to gain qualitative insights that should be considered in sit/stand desk automation for healthy and productive behaviors. Subsequently, by utilizing data collected in the "Predictors" phase (shown in Figure 3), we will apply a bidirectional long short-term memory (bi-LSTM) model for intention and behavior modeling, known for its robust performance in maintaining long-term storage of internal states and exploiting distant temporal dependencies within the data [10, 15, 24].

We will connect this developed prediction model with sit-stand desks to control the height automatically based on workers' ongoing and imminent computer activities. By completing this study, we believe that the outcome can confirm the effectiveness of the intelligent system, which integrates contextual metadata, the predictive model, and sit-stand desks for promoting healthy behavior and working productivity.

4 FUNDING

This research was supported by a research grant from the Office Ergonomics Research Committee (OERC).

REFERENCES

- [1] Dechristian França Barbieri, Svend Erik Mathiassen, Divya Srinivasan, Wilian Miranda Dos Santos, Roberto Santos Inoue, Adriano Almeida Gonçalves Siqueira, Helen Cristina Nogueira, and Ana Beatriz Oliveira. 2017. Sit-stand tables with semi-automated position changes: A new interactive approach for reducing sitting in office work. *IJSE Transactions on Occupational Ergonomics and Human Factors* 5, 1 (2017), 39–46.
- [2] Baskaran Chandrasekaran, Arto J Pesola, Chythra R Rao, and Ashokan Arumugam. 2021. Does breaking up prolonged sitting improve cognitive functions in sedentary adults? A mapping review and hypothesis formulation on the potential physiological mechanisms. *BMC musculoskeletal disorders* 22, 1 (2021), 1–16.

- [3] Josephine Y Chau, Michelle Daley, Anu Srinivasan, Scott Dunn, Adrian E Bauman, and Hidde P Van Der Ploeg. 2014. Desk-based workers' perspectives on using sit-stand workstations: a qualitative analysis of the Stand@ Work study. *BMC Public Health* 14, 1 (2014), 1–10.
- [4] Bryna CR Christmas, Lee Taylor, Anissa Cherif, Suzan Sayegh, and Daniel P Bailey. 2019. Breaking up prolonged sitting with moderate-intensity walking improves attention and executive function in Qatari females. *PLoS One* 14, 7 (2019), e0219565.
- [5] Louis Coraggio. 1990. *Deleterious effects of intermittent interruptions on the task performance of knowledge workers: A laboratory investigation*. The University of Arizona.
- [6] Esmond N Corlett. 2006. Background to sitting at work: research-based requirements for the design of work seats. *Ergonomics* 49, 14 (2006), 1538–1546.
- [7] Stephen Dewitt, Jennifer Hall, Lee Smith, John P Buckley, Stuart JH Biddle, Louise Mansfield, and Benjamin Gardner. 2019. Office workers' experiences of attempts to reduce sitting-time: an exploratory, mixed-methods uncontrolled intervention pilot study. *BMC public health* 19, 1 (2019), 1–10.
- [8] Ulf Ekelund, Jostein Steene-Johannessen, Wendy J Brown, Morten Wang Fagerland, Neville Owen, Kenneth E Powell, Adrian Bauman, I-Min Lee, Lancet Physical Activity Series, Lancet Sedentary Behaviour Working Group, et al. 2016. Does physical activity attenuate, or even eliminate, the detrimental association of sitting time with mortality? A harmonised meta-analysis of data from more than 1 million men and women. *The lancet* 388, 10051 (2016), 1302–1310.
- [9] Gregory Garrett, Hongwei Zhao, Adam Pickens, Ranjana Mehta, Leigh Preston, Amy Powell, and Mark Benden. 2019. Computer-based Prompt's impact on postural variability and sit-stand desk usage behavior; a cluster randomized control trial. *Applied Ergonomics* 79 (2019), 17–24.
- [10] Klaus Greff, Rupesh K Srivastava, Jan Koutnik, Bas R Steunebrink, and Jürgen Schmidhuber. 2016. LSTM: A search space odyssey. *IEEE transactions on neural networks and learning systems* 28, 10 (2016), 2222–2232.
- [11] Nyssa T Hadgraft, Lisa Willenberg, Anthony D LaMontagne, Keti Malkoski, David W Dunstan, Genevieve N Healy, Marj Moodie, Elizabeth G Eakin, Neville Owen, and Sheleigh P Lawler. 2017. Reducing occupational sitting: Workers' perspectives on participation in a multi-component intervention. *International Journal of Behavioral Nutrition and Physical Activity* 14 (2017), 1–13.
- [12] Edward Cutrell Mary Czerwinski Eric Horvitz. 2001. Notification, disruption, and memory: Effects of messaging interruptions on memory and performance. In *Human-Computer Interaction: INTERACT*, Vol. 1. 263.
- [13] Donghan Hu and Sang Won Lee. 2020. ScreenTrack: Using a Visual History of a Computer Screen to Retrieve Documents and Web Pages. In *Proceedings of the 2020 CHI Conference on Human Factors in Computing Systems*. 1–13.
- [14] Donghan Hu and Sang Won Lee. 2022. Scrapbook: Screenshot-Based Bookmarks for Effective Digital Resource Curation across Applications. In *Proceedings of the 35th Annual ACM Symposium on User Interface Software and Technology*. 1–13.
- [15] Zhiheng Huang, Wei Xu, and Kai Yu. 2015. Bidirectional LSTM-CRF models for sequence tagging. *arXiv preprint arXiv:1508.01991* (2015).
- [16] Michelle Kilpatrick, Kristy Sanderson, Leigh Blizzard, Brook Teale, and Alison Venn. 2013. Cross-sectional associations between sitting at work and psychological distress: reducing sitting time may benefit mental health. *Mental Health and Physical Activity* 6, 2 (2013), 103–109.
- [17] Jiameng Ma, Dongmei Ma, Zhi Li, and Hyunshik Kim. 2021. Effects of a Workplace Sit-Stand Desk Intervention on Health and Productivity. *International journal of environmental research and public health* 18, 21 (2021), 11604.
- [18] Ewelina Matusiak-Wieczorek, Anna Lipert, Ewa Kochan, and Anna Jegier. 2020. The time spent sitting does not always mean a low level of physical activity. *BMC Public Health* 20, 1 (2020), 1–5.
- [19] Ranjana K Mehta, Ashley E Shortz, and Mark E Benden. 2016. Standing up for learning: A pilot investigation on the neurocognitive benefits of stand-biased school desks. *International journal of environmental research and public health* 13, 1 (2016), 59.
- [20] George Papatheanasiou, GEORGE Georgoudis, Maria Papandreou, Panagiotis Spyropoulos, Dimitris Georgakopoulos, Vasiliki Kalfakakou, and Angelos Evangelou. 2009. Reliability measures of the short International Physical Activity Questionnaire (IPAQ) in Greek young adults. *Hellenic J Cardiol* 50, 4 (2009), 283–294.
- [21] Dario D Salvucci. 2010. On reconstruction of task context after interruption. In *Proceedings of the sigchi conference on human factors in computing systems*. 89–92.
- [22] Pankaj Parag Sharma, Ranjana K Mehta, Adam Pickens, Gang Han, and Mark Benden. 2019. Sit-stand desk software can now monitor and prompt office workers to change health behaviors. *Human factors* 61, 5 (2019), 816–824.
- [23] Wendell C Taylor. 2011. Prolonged sitting and the risk of cardiovascular disease and mortality. *Current cardiovascular risk reports* 5 (2011), 350–357.
- [24] Ziyang Xie, Li Li, and Xu Xu. 2022. Real-time driving distraction recognition through a wrist-mounted accelerometer. *Human factors* 64, 8 (2022), 1412–1428.
- [25] Lin Yang, Chao Cao, Elizabeth D Kantor, Long H Nguyen, Xiaobin Zheng, Yikyung Park, Edward L Giovannucci, Charles E Matthews, Graham A Colditz, and Yin Cao. 2019. Trends in sedentary behavior among the US population,